

1. Check the fitment of the part with the bumper.

2. Attach the splitter to the bumper with a few screws to keep it sticking to the bumper.

3. Disassemble the bumper with the splitter.



More installation manuals on our website: [www.maxtondesign.com/manuals](http://www.maxtondesign.com/manuals)




4. Drill the bumper in places consistent with the splitter holes.

5. Place the bolts in the holes - with the head from the ground side, with the thread from the inside of the bumper. When the splitter is attached with a few bolts, remove the screws (shown in step 2)

6. Tighten all bolts firmly (20 pieces).

7. After installing the splitter, reinstall the bumper to the car.

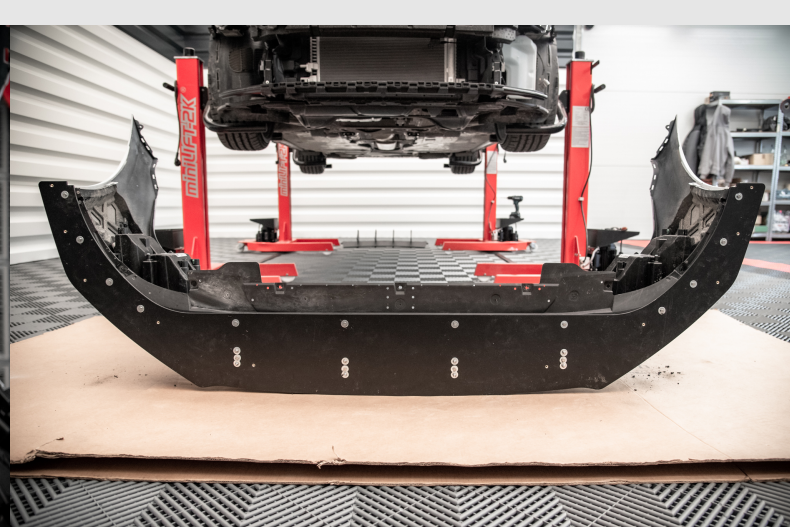

More installation manuals on our website: [www.maxtondesign.com/manuals](http://www.maxtondesign.com/manuals)